

MSP the iconic and original multi surface, interior exterior, self priming* and self undercoating paint. Produced for over 25 years in our UK factory. This unique and innovative product has stood the test of time. Class 0 fire rated. MSP is a registered trade mark of Bedec Products Ltd.

Coverage: Approximately 13-15m² per litre, depending on substrate porosity and application method. Available in 750ml and 2.5 litres (all colours) 250ml, 5 litres and 20 litres (selected colours)

BARN PAINT

The original Barn Paint, initially formulated for restoration

work on Essex barns. However our customers have over

the years found Bedec Barn Paint to perform successfully

on many substrates around farms, gardens factories and

even houses. It also exhibits the unique multi-surface,

Coverage: Approx. 13-15 m² per litre per coat depending

upon substrate texture, porosity and application method

self priming* and self undercoating properties.

Available in 2.5 litres, 5 litres and 20 litres



Acrylic Floor Paint affords the complete solution for interior commercial and domestic floor needs and is suitable for use on wood and concrete. It contains a fine aggregate to help provide slip resistance. The final coat should be allowed to dry for at least 16-24 hours before the floor is returned to full use. Do not use where prolonged contact with wet or soft compound vehicle tyres can occur.

AQUA-ADVANCED

professional decorator. Aqua Advanced Gloss. Satin and

Primer/Undercoat exhibit excellent gloss, sheen, flow out

A range of top quality products formulated for the

Coverage: approx. 13-15 m² per litre for each coat

Aqua Advanced High Obliterating Matt is specifically

Coverage: approx. 8-12 m² per litre for each coat

formulated to give excellent covering power combined with

Available in 1 litre, 2.5 litres & 5 litres

Coverage: approx 8-12m² per litre for each coat Available in 1 litre, 2.5 litres, 5 litres and 20 litres





Elastomeric Coatings

A unique range of products formulated to form seamless flexible coatings which flex and stretch with the substrate.



Extra-Flex is a premium quality smooth masonry paint which provides a professional finish with outstanding protection. Designed to fill and bridge hair line cracks and can stretch up to 400% as well as being an anti carbonation coating.

Coverage: approx 8-12m² per litre for each coat Available in 5 litres



Interior-Flex is a flexible matt emulsion ideal for interior and bridged.



Super-Flex is ideal for roofs and walls and economically

Coverage: no more than 2m² per litre on roofs / 8m² per litre on walls







walls and ceilings where hairline cracks need to be filled

Coverage: approx. 8-12m² per litre for each coat Available in 2.5 litres and 5 litres



prevents or cures all types of leaking roof, gutters and walls.

Available in 2.5 litres, 5 litres and 20 litres



All of our products are water-based and therefore should only be applied at air and surface temperatures above 8°C and protected from frost. Do not apply when foggy or likely to rain before the paint has dried. It is essential when using these unique products that all surfaces are free from oil, grease, dirt, dust and loose particles. On existing painted surfaces remove all loose and flaking paint and thoroughly rub down with abrasive paper. Areas affected by mould, lichen, algae or moss should be treated with a suitable fungicidal wash.

All our products are normally touch dry in 2 hours and re-coatable after 4 hours (18°C 65% RH). Super-Flex due to thicker film is re-coatable after 4-6 hours.


Pressure treated timber should be weathered for 6 months. Do not apply to substrates that have had water repellent treatments. Denatured wood should be abraded to reveal new cells. Any new planed wood should be abraded to allow maximum penetration. On untreated, weathered wood, new wood, cement render, plaster, brick work or any porous substrate the first coat should be thinned with 30-40% clean water to act as a primer coat. *Prime steel or metal surfaces liable to rust with a suitable metal primer.

Some surfaces are liable to have water solubles which can cause staining, especially with white and lighter colours. Substrates to be careful of are some plywoods, red cedarwood, very resinous timber or damp walls. Knots and areas liable to staining, should be sealed with Bedec Stain Block.

All of our products can be applied by brush, roller and spray. For spraying use airless or HVLP.

For full application and preparation details refer to our can instructions and Technical Data Sheets.

www.bedec.co.uk

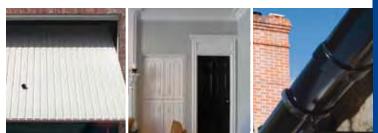





Don't just decorate... BEDEC-ORATE!





Product Range and

Colour Card

Innovators in Water-based Technology



Bedec Products Ltd. Units 1 & 2 Poplars Farm, Aythorpe Roding, Dunmow, Essex. CM6 1RY

> **Tel:** +44 (0) 1279 876 657 Email: info@bedec.co.uk www.bedec.co.uk











good scrub resistance.

Available in 2.5 litres & 5 litres

and coverage.















SURFACE

PAINT

Spearmint

Parchment

Powder Blue

Lagoon

MSP stock colours - Gloss and Satin

Interior and exterior

Save time and money

Microporous, low VOC and

environmentally friendly

No primer or undercoat needed

Mushroom

Butterscotch

Ivory

Blush

Ivy Green



and radiators

SURFACE

PAINT

Red Cossack

Inca

Jade Silk

MSP - Gloss and Satin



• Use on wood, MDF, metals, plastics,

galvanised steel, aluminium, copper

Gloss, Satin and Matt in various colours

Soft White

Magnolia

Soft Cream

Regency White

Light Grey

Dark Grey

Old White

MSP - Satin only

tiles, masonry, plaster, UPVC,



colour retention

Easy to apply

blistering and flaking

Tough and durable with excellent

concrete, brick and cladding

Prevents rot and algal build-up

· Use on wood, galvanised steel, plastic,

Excellent resistance against cracking,













- Waterproof and quick drying Highbuild and seamless
- Ultraviolet protection
- Long life durable coating
- · Reduces maintenance costs




Suitable for application to many surfaces

Super-Flex stock colours	
Light Grey	Dark Green
Battleship Grey	Black







White *



- Non yellowing · Excellent flow





- Tintable
- Long lasting





riqua riavarioca stock ocioars	riigir aloss and ol		



Dark Grey *

* Primer / undercoat only



Smooth finish

Long lasting

Microporous

Flexible

Extra-Flex stock colours

Brilliant White

Old White

Gardenia

Cream

Magnolia

Suffolk Pink

• Stretches up to 400%

Fine crack bridging

Apply with brush, roller or spray

Buttermilk

Parchment

Portland Stone

Sand Stone

Woodash

French Grey

Water-based and quick drying



- Protects and enhances the substrate
- Eases removal of dirt, dust, oil and grease • Used for identification of specific areas
- · Reduce dusting, which causes damage to electrical equipment
- Contains a micro aggregate to give slip resistant properties
- Suitable for new concrete

Floor Paint stock colours

ACRYLIC

FLOOR

PAINT

hite	Black
ue	Tile Red
40	Tilo Flod
ark Green	Yellow
ght Grey	Battleship Grey
	1



- Fine crack bridging

]		
	1		
	1		
ant White	•	Magnolia	
and animo		iviaqi iolia	

Gloss, Satin and Matt

23033

BARN PAIN



Gardenia

Woodland Green

Chestnut

Eucalyptus

Magnolia







Evergreen Green Haze Soft Pink Soft Violet Soft Mint Violet Soft Yellow Soft Lime





